

# Effect of Geometrical Parameters of Draft Tubes and Clear Liquid Height on Gas Holdup in a Bubble Column for Gas Dispersion into Tubes

Fukuji Yamashita\*

Dept. of Applied Chemistry, Kanagawa Institute of Technology, Atsugi 243-0292, Japan

(Received 2 April 1999 • accepted 26 July 1999)

**Abstract**—The effects of the geometrical parameters of draft tubes and the clear liquid height on the average gas holdup  $E_G$  in a 0.16 m I.D. bubble column for gas dispersion into the tubes were experimentally studied in an air-tap water system. The gas holdup depended on the superficial gas velocity  $U_G$ , the kinds of gas spargers, the diameter and length of the draft tubes, clearance  $C_b$  between the lower end of the draft tube and the bottom of the bubble column, and the clear liquid height  $H_L$ .  $E_G$  increased with decreasing hole diameter of the gas sparger at a small gas velocity  $U_G$ , but did not depend on the kinds of gas spargers at a large  $U_G$ .  $E_G$  decreased with increasing clear liquid height  $H_L$ . The effect of  $H_L$  on  $E_G$  was well expressed by the modified three-region model. The experimental data of  $E_G$  were correlated.

**Key words:** Bubble Column, Air Lift, Draft Tube, Gas Holdup, Liquid Height


## INTRODUCTION

Bubble columns with a draft tube have been increasingly used in waste water treatment, fermentation and chemical processes. The gas holdup is an important parameter for the design of a bubble column with a draft tube. There have been several research studies about the gas holdup in bubble columns with a draft tube [Bello et al., 1985; Koide et al., 1983; Merchuk et al., 1994; Weiland, 1984].

Koide et al. [1983] have reported the effects of the kinds of the gas spargers, the lower clearance  $C_b$ , inner diameter of the draft tube  $D_i$  and diameter of bubble column  $D_T$  on  $E_G$  in bubble columns with a draft tube for gas dispersion into a tube. Weiland [1984] also has studied the effect of  $D_i$  on  $E_G$  for an air-water system. Bello et al. [1985] have reported the effect of the ratio of downcomer-to-riser cross sectional area on the gas holdup for concentric and external-loop bubble columns. Merchuk et al. [1994] have reported the effects of the geometrical design of draft tubes on  $E_G$  for 0.158 and 0.318 m I.D. bubble columns.

However, the effects of gas sparger type, diameter and length of the draft tube, clearance between the lower end of the draft tube and the bottom of the bubble column, and the clear liquid height on the gas holdup in the bubble column with a draft tube have not yet been fully clarified.

In this work, the effects of the kinds of gas spargers, diameter and length of the draft tube, clearance between the lower end of the draft tube and bottom of the bubble column, and height of the clear liquid on the gas holdup in the bubble column with a draft tube were experimentally studied and the results were analyzed and correlated. Also, a modified three-region model was presented to explain the effect of the clear liquid height on the gas holdup in a bubble column with a draft

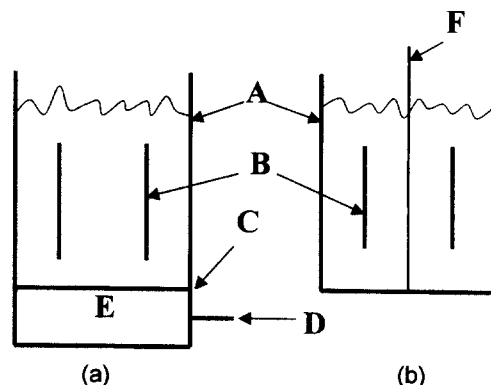

**Fig. 1. Schematic diagram of experimental apparatus.**

(a) bubble column with a perforated plate sparger, (b) bubble column with a vertical pipe sparger. A=bubble column, B=draft tube, C=perforated plate, D=gas inlet, E=gas chamber, F=steel pipe gas sparger

tube.

## EXPERIMENTAL

Fig. 1 shows a schematic diagram of the experimental apparatus. Fig. 1(a) and (b) show a bubble column with a perforated plate and a vertical steel pipe as a gas sparger, respectively. The bubble column used was made of transparent acrylic resin. Its diameter and height were 0.16 m and 2.4 m, respectively. The gas spargers used consisted of perforated plates and a 0.009 m I.D. steel pipe. The pipe, which had two holes on its side at 0.015 m above the bottom of the bubble column, was inserted downwards at the center of the bubble column. The end of the steel pipe was closed with a rubber stopper. Details of the gas spargers used are listed in Table 1. The draft tubes used were made of acrylic resin and polyvinyl chloride resin pipes. Their lengths were 0.50-1.40 m. Details of the draft tubes used are

\*To whom correspondence should be addressed.

E-mail: yamasita@chem.kanagawa-it.ac.jp

**Table 1. Details of gas spargers used**

No.	d [m]	n [-]	p [m]	H <sub>N</sub> [m]	Remarks
1	0.0007	145	0.005	0	pp
2	0.001	45	0.005	0	pp
3	0.008	2	-	0.015	sp

Note : pp and sp mean a perforated plate and a steel pipe, respectively.

**Table 2. Details of draft tubes used**

No.	D <sub>i</sub> [m]	D <sub>o</sub> [m]	No.	D <sub>i</sub> [m]	D <sub>o</sub> [m]
1	0.050	0.060	5	0.083	0.090
2	0.056	0.060	6	0.090	0.110
3	0.075	0.095	7	0.110	0.130
4	0.078	0.090	8	0.130	0.140

listed in Table 2.

The liquid used was tap water at room temperature. During each run, liquid was neither fed nor discharged. Air was used as the gas. The gas was dispersed into the draft tube.

The average gas holdup  $E_G$  was obtained from the following equations:

$$E_G = (H_T - H_L) / (H_T - A) \quad (1)$$


$$A = V/S \quad (2)$$

where  $H_T$  and  $H_L$  are the height of the bubbling and clear liquid layers, respectively.  $H_T$  and  $H_L$  were visually measured.

### MODIFIED THREE-REGION MODEL

To express the effect of the clear liquid height,  $H_L$ , on the gas holdup in a bubble column with a draft tube, the following simple model was derived by modifying the three-region model [Yamashita, 1998]. It is assumed that the bubble column with a draft tube consists of the three regions, that is, the draft tube region, the bulk region and the foam layer as shown in Fig. 2.

From the gas balance in the bubble column with a draft tube, the following equations were derived:

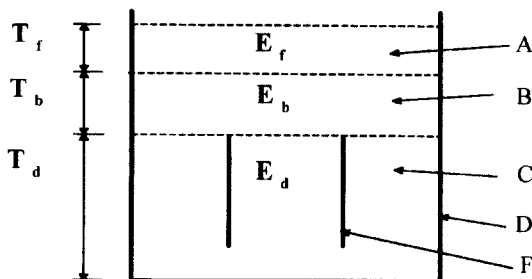**Fig. 2. Concept of three-region model.**

A=foam layer, B=bulk region, C=draft tube region, D=bubble column, F=draft tube,  $E_i$ ,  $T_i$ =gas holdup and thickness of  $i$ -region, respectively.

$$E_G H_T = E_d T_d + E_b T_b + E_f T_f \quad (3)$$

$$H_T = T_d + T_b + T_f \quad (4)$$

$$H_T = H_{L1} / (1 - E_G) \quad (5)$$

From Eqs. (3)-(5), the following equations are derived:

$$E_G = 1 - (1 - E_b) H_{L1} / (H_{L1} + B) \quad (6)$$

$$B = E_d T_d + E_f T_f - E_b (T_d + T_f) \quad (7)$$

If  $E_b$  and  $B$  are independent of  $H_{L1}$  and  $B > 0$ , the gas holdup  $E_G$  decreases with increasing  $H_{L1}$  and becomes equal to  $E_b$  at  $H_{L1} = \text{infinity}$ . From Eq. (6), the following equation is derived:

$$\frac{1}{1 - E_G} = \frac{B}{1 - E_b H_{L1}} + \frac{1}{1 - E_b} \quad (8)$$


That  $E_b$  is independent of  $H_{L1}$  means that  $E_b$  does not depend on the clear liquid height  $H_{L1}$ . And that  $E_G$  decreases with increasing  $H_{L1}$  and becomes equal to  $E_b$  at  $H_{L1} = \text{infinity}$  means that the effect of the draft tube region and the foam layer on the gas holdup  $E_G$  decreases with increasing clear liquid height and can be neglected at a large  $H_{L1}$ .

## EXPERIMENTAL RESULTS

### 1. Effect of Gas Spargers on $E_G$

Fig. 3 shows the effect of the gas spargers on the gas holdup in the bubble column with a draft tube of  $D_i = 0.13$  m. The average gas holdup increased with decreasing hole diameter of the gas sparger at a small  $U_G$ , but did not depend on the gas spargers at a large  $U_G$ .

At a small  $U_G$ , smaller bubbles are generated from the gas sparger with small diameter holes and rise with little change in their sizes. At a large  $U_G$ , bubble sizes depend mainly upon the

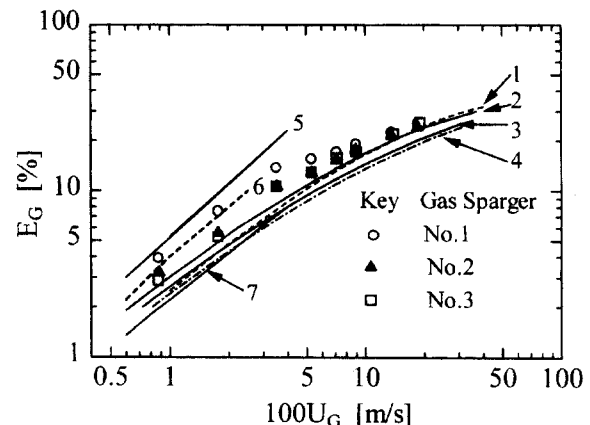

**Fig. 3. Effect of kinds of gas spargers on gas holdup and comparison between  $E_G$  and the correlations of gas holdups by previous investigators for air-water system at 293 K.** The experimental conditions are  $D_i = 0.13$  m,  $L_c = 1.40$  m,  $C_b = 0.03$  m and  $H_L = 1.50$  m. 1. Yamashita and Inoue [1975], 2. Akita and Yoshida [1973], 3. Koide et al. [1983] for  $F_{ar} = 0.8125$ , 4. Koide et al. [1983] for  $F_{ar} = 0.3125$ , 5. Merchuk et al. [1994], 6. Data of Merchuk et al. [1994] at  $D_T = 0.318$  m,  $D_i = 0.216$  m,  $L_c = 3.27$  m,  $C_b = 0.010$ - $0.080$  m and  $C_f = 0.040$  and  $0.240$  m, 7. Merchuk et al. [1994] at  $D_T = 0.158$  m,  $D_i = 0.11$  m,  $L_c = 1.395$  m,  $C_b = 0.012$  and  $C_f = 0.178$  m

turbulence in the bubble column. Therefore, the gas holdup increases with decreasing hole diameter of the gas sparger at a small  $U_G$ , but did not depend on the kinds of the gas spargers at a large  $U_G$ .

Fig. 3 also shows the comparison between this work and the previous studies for the gas holdup. It is clear that the experimental data for Nos. 2 and 3 gas spargers are nearly equal to the correlations of the gas holdup in the bubble column without draft tubes by Akita and Yoshida [1973], and Yamashita and Inoue [1975]. The gas holdup calculated by the correlation of Koide et al. [1983] for the bubble column with a draft tube and with gas dispersion into the draft tube is slightly smaller than the experimental data in this work.

The data of Merchuk et al. [1994] for a 0.318 m I.D. bubble column with a 0.216 m I.D. draft tube is nearly equal to the data for the No. 1 gas sparger. Their data for a 0.158 m I.D. bubble column with a 0.110 m I.D. draft tube are slightly smaller than the experimental data in this work, because they used a wide separator of 0.213 m inner diameter on the top of the bubble column. The gas sparger used by Merchuk et al. [1994] was a ring sparger of  $d=0.001$  m and  $n=40$ . The correlation of Merchuk et al. [1994] is slightly larger than the experimental data in this work.

Koide et al. [1983] have reported for a 0.14 m I.D. bubble column with a draft tube that the gas holdup does not depend on the kinds of gas spargers, but that the volumetric mass transfer coefficient depends on the kinds of gas spargers. The reason why the gas holdup by Koide et al. [1983] does not depend on the kinds of the gas spargers is not clear.

## 2. Effect of Inner Diameter $D_i$ of the Draft Tube on $E_G$

Figs. 4 and 5 show the effect of the inner diameter  $D_i$  of the draft tube on gas holdup  $E_G$  in the bubble column with a draft tube at  $L_d/H_L=0.833$  and  $0.333$  for  $L_d=0.50$  m, respectively.  $E_G$  at  $D_i=0.16$  m means the gas holdup in the bubble column without a draft tube. Fig. 4 shows that the gas holdup  $E_G$  increased with decreasing  $D_i$  and was maximum at  $D_i=0.078$  m– $0.09$  m at a large  $U_G$ . However, Fig. 5 shows that the gas holdup  $E_G$  was nearly constant in the range of  $D_i>0.078$  m and decreased slightly with decreasing  $D_i$  in the range of  $D_i<0.078$  m. It is

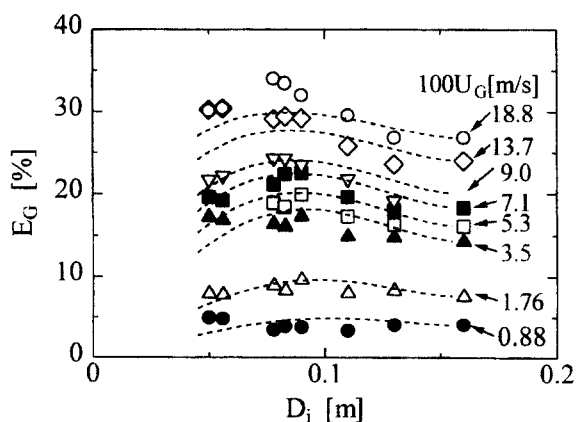


Fig. 4. Effect of  $D_i$  on  $E_G$  at  $H_L=0.60$  m,  $L_d=0.50$  m,  $C_b=0.03$  m and  $L_d/H_L=0.833$ .

Dotted lines mean calculated values by Eqs. (9)–(13) with experimental data of  $E_s$ .

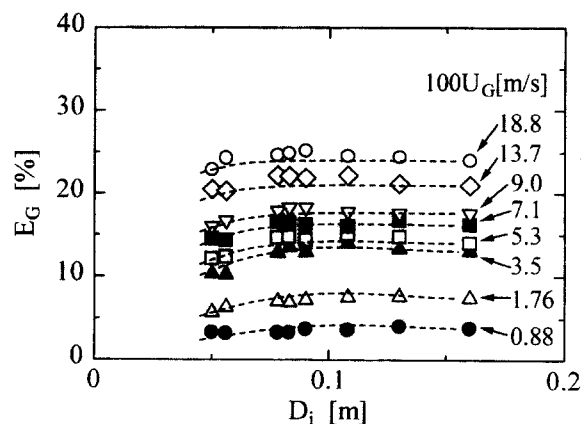


Fig. 5. Effect of inner diameter  $D_i$  of draft tube on  $E_G$  at  $H_L=1.50$  m,  $L_d=0.50$  m,  $C_b=0.03$  m,  $L_d/H_L=0.333$  and No. 1 gas sparger.

Dotted lines mean calculated value of  $E_G$  by Eqs. (9)–(13) with experimental values of  $E_s$ .

clear from these figures that the maximum of the gas holdup increases with increasing ratio of  $(L_d/H_L)$ . This means that the effect of  $D_i$  on  $E_G$  increases with increasing ratio of  $(L_d/H_L)$ . At  $U_G=0.0088$  m/s,  $E_G$  did not depend upon  $D_i$  and was nearly constant.

Fig. 6 shows the effect of  $D_i$  on  $E_G$  at  $(L_d/H_L)=0.933$  and  $L_d=1.40$  m. Though the ratio of  $(L_d/H_L)=0.933$ ,  $E_G$  increased only slightly with decreasing  $D_i$  and was maximum at about  $D_i=0.080$  m in the range of  $U_G>0.035$  m/s. In the range of  $U_G<0.035$  m/s,  $E_G$  was nearly constant in the range of  $D_i>0.056$  m, but decreased slightly at  $D_i=0.050$  m. These results are explained as follows.

When gas is spouted into a shallow liquid layer at a high speed, the liquid layer becomes a froth layer or a foam layer, and the gas holdup in the layer increases substantially with increasing  $U_G$  and decreasing  $H_L$ . However, the gas holdup becomes nearly constant in the range of  $H_L>H_{LC}$  [Kawagoe et al., 1974; Takahashi et al., 1974; Yamashita, 1985, 1997].  $H_{LC}$  is the critical clear liquid height above which the gas holdup becomes

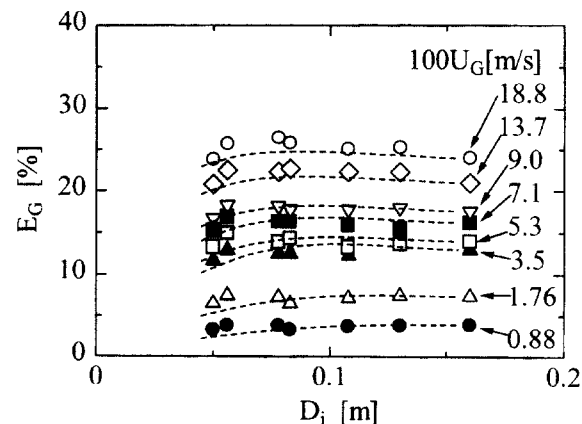


Fig. 6. Effect of inner diameter  $D_i$  of draft tube on  $E_G$  at  $H_L=1.50$  m,  $L_d=1.40$  m,  $C_b=0.03$  m,  $L_d/H_L=0.933$  and No. 1 gas sparger.

Dotted lines mean calculated value of  $E_G$  by Eqs. (9)–(13) with experimental values of  $E_s$ .

constant. Takahashi et al. [1974] have reported that  $H_{LC}$  is 0.50 m. The gas velocity at the top of the draft tube and the effect of the spouting of the gas from the draft tube increase with decreasing  $D_i$ . Therefore, the gas holdup increases with decreasing  $D_i$ , and the maximum of the gas holdup increases with increasing ratio of  $(L_d/H_L)$ . However, when the length  $L_d$  of the draft tube is long, the effect of  $D_i$  becomes very small, because the top section above the draft tube becomes a small portion of the entire bubbling layer. Therefore, for  $L_d=1.40$  m the gas holdup increased only very slightly with decreasing  $D_i$  even at  $(L_d/H_L)=0.933$ .

The reason why the gas holdup for the draft tube of  $D_i=0.05$ – $0.056$  m decreased slightly is because the circulation of the gas and liquid is weak and most of the annular section is almost bubble-free, though the effect of the spouting of gas and liquid is large.

Weiland [1984] has studied the effect of  $D_i$  on  $E_G$  under the condition of  $U_G<0.035$  m/s,  $D_i=0.20$  m,  $F_{ai}=0.59$ – $1.0$ ,  $L_d=1.50$  m,  $H_L=1.70$  m and  $L_d/H_L=0.77$  for an air-water system and reported that the gas holdup is almost equal to  $E_s$  in the range of  $F_{ai}>0.74$  and that the gas holdup is rather small at  $F_{ai}=0.59$ . It is clear from Fig. 5 in the range of  $U_G<0.035$  m/s that  $E_G$  is nearly equal to  $E_s$  in the range of  $F_{ai}>0.35$  and that  $E_G$  is rather small at  $F_{ai}=0.313$ . The experimental results in this work resemble those of Weiland [1984].

Koide et al. [1983] have reported that  $E_G$  is proportional to  $F_{ai}^{0.114}$  in the range of  $F_{ai}=0.471$ – $0.743$ ,  $L_d=1.40$  m and  $D_i=0.10$ – $0.300$  m. The results of Koide et al. [1983] are nearly equal to those at large  $L_d$  in this work.

### 3. Effect of Clearance $C_b$ between Lower End of Draft Tube and Bottom of Bubble Column

Fig. 7 shows an example of the effect of  $C_b$  on  $E_G$ . The experimental conditions are  $D_i=0.056$  m,  $L_d=1.40$  m,  $H_L=1.55$  m and the No. 2 gas sparger.  $E_G$  was nearly constant at a small  $U_G$ . However, at a large  $U_G$ ,  $E_G$  increased with increasing  $C_b$  and became maximum at  $C_b=C_{b,m}$ .  $E_G$  became nearly constant in the range of  $C_b>C_{b,cr}$ . This result is explained as follows.

At a large  $U_G$ , the circulation of liquid increases with increasing  $C_b$  and bubbles begin to descend into the annulus. Therefore,  $E_G$  increases with increasing  $C_b$  in the range of  $C_b<C_{b,m}$ . In the range of  $C_b>C_{b,m}$  the circulation of liquid becomes so

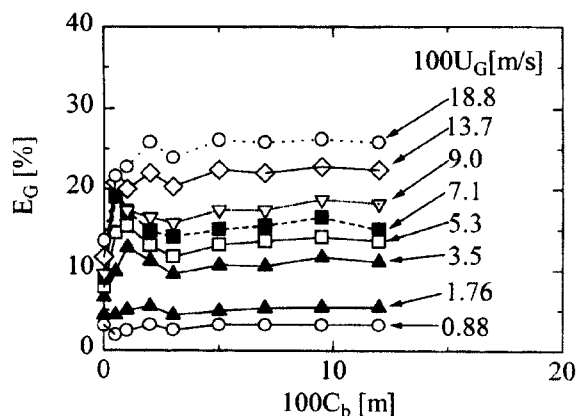


Fig. 7. Effect of  $C_b$  on  $E_G$  in No. 2 gas sparger at  $D_i=0.056$  m,  $L_d=1.40$  m and  $H_L=1.55$  m.

strong that bubbles rise faster in the draft tube. Therefore,  $E_G$  begins to decrease with increasing  $C_b$ . However, in the range of  $C_b>C_{b,cr}$  the clearance is so large that the circulation of liquid and gas does not depend on  $C_b$ . Therefore,  $E_G$  becomes nearly constant.

In the range of  $U_G<0.018$  m/s for  $C_b=0.095$  m, gas leakage from the lower end of the draft tube into the annulus occurred due to the fluctuation of bubble flow just above the gas sparger, but did not occur in the range of  $U_G>0.035$  m/s because of the strong circulation of the liquid. For  $C_b=0.12$  m, the gas leakage from the lower end of the draft tube into the annulus occurred at all  $U_G$ , because of too large a  $C_b$  value.

$C_{b,m}$  and  $C_{b,cr}$  depended on  $D_i$  and  $U_G$ , and most data for  $C_{b,m}$  and  $C_{b,cr}$  were less than 0.01 m and 0.03 m, respectively. Koide et al. [1983] have reported that  $E_G$  is not affected by  $C_b$  in the range of  $C_b=0.010$  m– $0.082$  m for a 0.082 m I.D. draft tube in a 0.14 m I.D. bubble column. Their data are nearly equal to  $C_b$  for  $D_i=0.078$  m in this work.

Merchuk et al. [1994] have reported for 0.158 and 0.318 m I.D. bubble columns with a draft tube that  $E_G$  increases with  $C_b^{0.1}$ . The reason why their data increased with  $C_b^{0.1}$  is not clear, but the difference from this work may be small.

Fig. 8 shows the effect of  $F_{ai}$  on the gas holdup  $E_G$  at  $C_b=0$ .  $E_G$  at  $C_b=0$  decreased remarkably with decreasing  $F_{ai}$ , because the bubble-free annulus increased with decreasing  $F_{ai}$ .

### 4. Effect of Length $L_d$ of Draft Tube on $E_G$

For a large  $D_i$ , the gas holdup increased slightly with increasing  $L_d$  at a large  $U_G$  and was nearly constant at a small  $U_G$ . However, for  $D_i=0.05$  m,  $E_G$  decreased with increasing  $L_d$  and became minimum at  $L_d=1.03$  m as shown in Fig. 9. Fig. 9 shows the effect of  $L_d$  on  $E_G/E_s$  for  $D_i=0.05$  m.  $E_G$  at  $L_d=0$  means  $E_s$ ,  $E_s$  means the average gas holdup in the bubble column without a draft tube. This result is explained as follows.

The upper clearance  $C_t$  above the draft tube decreases and the spouting effect of the gas and liquid from the draft tube into the upper section increases with increasing  $L_d$  at a given  $H_L$ . However, for the draft tube of small  $D_i$ , the circulation of liquid is weak and most bubbles, except very fine ones, do not descend; most of the annular region is almost bubble-free. Therefore, the

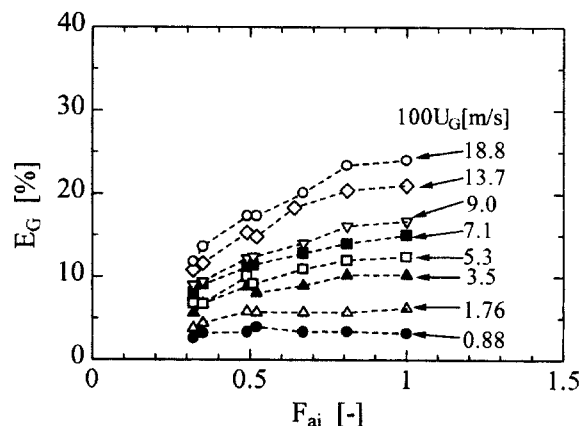


Fig. 8. Effect of  $F_{ai}$  on gas holdup at  $C_b=0$ .

The experimental conditions are  $L_d=1.40$  m,  $H_L=1.40$  m and No. 2 gas sparger

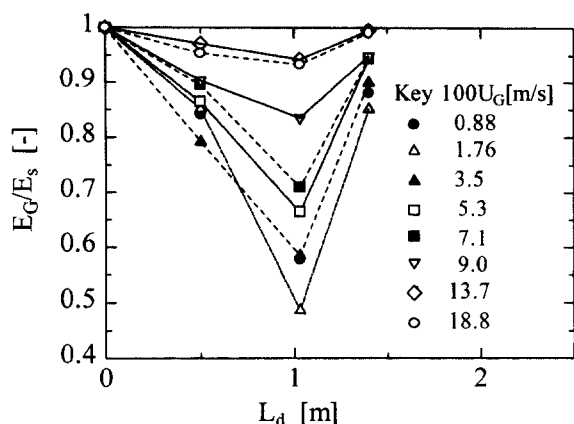


Fig. 9. Effect of  $L_d$  on  $E_G$  at  $D_i=0.050$  m,  $C_b=0.03$  m,  $H_L=1.50$  m and No. 1 gas sparger.

gas holdup decreases with increasing  $L_d$ . However, at  $L_d=1.40$  m the gas holdup again increases due to the spouting effect of gas and liquid into the shallow liquid layer above the top of the draft tube. So the gas holdup became minimum at  $L_d=1.03$  m.

#### 5. Effect of Clear Liquid Height $H_L$ on $E_G$

$E_G$  decreased with increasing  $H_L$ . Fig. 10 shows the plot of  $1/(1-E_G)$  vs.  $(1/H_{L1})$ . It is clear that the experimental data are well expressed by Eq. (8) and that the effect of the clear liquid height on the gas holdup can be well expressed by the modified three-region model. Table 3 shows the values of  $E_b$  and  $B$  obtained from Fig. 10.

Merchuk et al. [1994] have also reported that  $E_G$  is proportional to  $C_r^{-0.07}$ .  $C_r$  is the top clearance above the draft tube and is equal to  $(H_L - L_d - C_b)$ . Therefore, this means that  $E_G$  decreases slightly with increasing  $H_L$ .

#### 6. Correlation of Experimental Data

$E_G$  was correlated in the range of  $C_b > 0.03$  m using the following equations:

$$E_G/E_s = Z_1 Z_2 \quad (9)$$

$$Z_1 = 1 - (1 - F_{ai})^M \quad (10)$$

$$Z_2 = 1 + 70 \left( \frac{L_d}{D_T} \right)^{-2} \left( \frac{L_d}{H_L} \right)^q [F_{ai}(1 - F_{ai})]^2 \quad (11)$$

$$M = 18(\text{Fr})^{0.41} \quad (12)$$

$$q = 35.3(\text{Fr})^{0.83} \quad (13)$$

These equations are applicable for  $D_i=0.05$ - $0.13$  m,  $L_d=0.50$ - $1.40$  m,  $H_L=0.60$ - $1.55$  m and  $C_b=0.03$ - $0.182$  m.

Fig. 11 shows the comparison between the experimental data

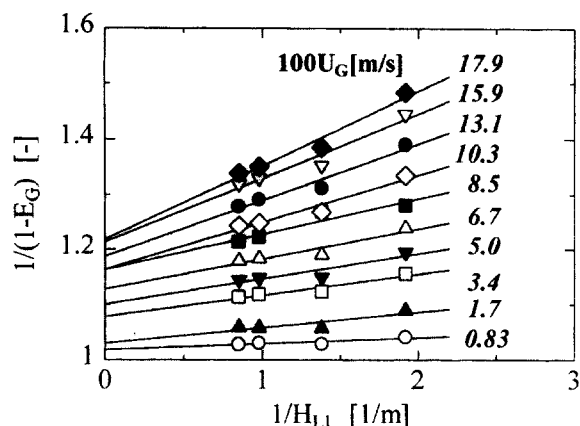


Fig. 10. Plot of  $1/(1-E_G)$  vs.  $1/H_{L1}$  at  $D_i=0.09$  m,  $L_d=0.50$  m,  $C_b=0.03$  m and No. 2 gas sparger.

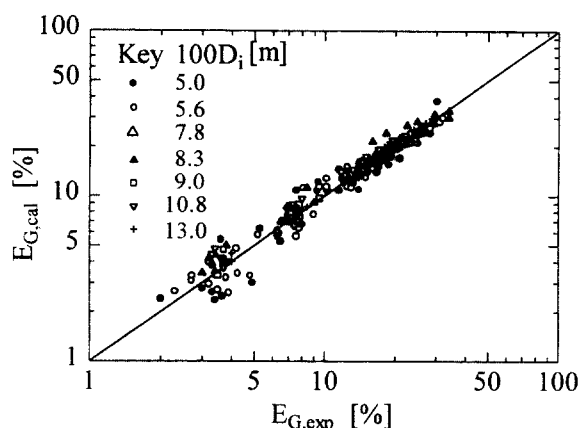


Fig. 11.  $E_{G,cal}$  vs.  $E_{G,exp}$  for No. 1 gas sparger.

for  $E_G$  and values calculated by Eqs. (9)-(13) with the experimental data for  $E_s$ . The average error with Eqs. (9)-(13) was 7.67% for 1,056 data for  $E_G$ . Dotted lines in Figs. 4-6 mean values for  $E_G$  calculated by Eqs. (9)-(13) with the experimental data for  $E_s$ . It is clear from these figures that Eqs. (9)-(13) show fairly good agreement with the experimental data.

### CONCLUSION

The effects of the geometrical parameters of draft tubes and the clear liquid height on the average gas holdup  $E_G$  in a 0.16 m I.D. bubble column for the gas dispersion into a draft tube were experimentally studied in an air-tap water system.  $E_G$  depended on the kinds of the gas spargers,  $U_G$ ,  $D_i$ ,  $L_d$ ,  $C_b$  and  $H_L$ .

$E_G$  increased with decreasing hole diameter of the gas sparger at a small gas velocity  $U_G$ , but did not depend on the kinds of gas spargers at a large  $U_G$ . At a large  $L_d$ ,  $E_G$  did not depend on  $D_i$  and was nearly equal to  $E_s$ , but at a small  $L_d$ ,  $E_G$  increased with increasing ratio of  $(L_d/H_L)$  and was maximum at  $D_i=0.078$ - $0.09$  m.

In the range of  $U_G > 0.035$  m/s,  $E_G$  increased with increasing  $C_b$  in the range of  $C_b < C_{b,m}$  and was maximum at  $C_{b,m}$ . But in the range of  $U_G < 0.035$  m/s,  $E_G$  was nearly constant. In the range of  $C_b > C_{b,c}$ ,  $E_G$  did not depend on  $C_b$  and was nearly constant.

$E_G$  at  $C_b=0$  increased with increasing  $F_{ai}$ .  $E_G$  decreased with

Table 3. Values of  $E_b$  and  $B$  obtained from Fig. 10

100 $U_G$ [m/s]	$E_b$ [-]	100 $B$ [m]	100 $U_G$ [m/s]	$E_b$ [-]	100 $B$ [m]
0.83	0.0182	0.0104	8.5	0.139	0.0505
1.70	0.0295	0.0269	10.3	0.128	0.0833
3.4	0.0705	0.0351	13.1	0.156	0.0872
5.0	0.0924	0.0408	15.9	0.176	0.0956
6.7	0.113	0.0487	17.9	0.178	0.111

increasing clear liquid height  $H_L$ . The effect of  $H_L$  on  $E_G$  was well expressed by the modified three-region model. The experimental data of  $E_G$  in the range of  $C_b > C_{b,cr}$  were correlated by Eqs. (9)–(13).

### ACKNOWLEDGEMENT

The author wishes to thank Messrs M. Oishi, Y. Kumazoe, H. Sato and S. Yamada, former students at Department of Chemical Technology, Kanagawa Institute of Technology for their experimental work.

### NOMENCLATURE

A	: parameter defined by Eq. (2) [m]
B	: parameter defined by Eq. (7) [m]
$C_b$	: clearance between lower end of draft tube and bottom of bubble column [m]
$C_{b,m}$	: $C_b$ at which $E_G$ becomes minimum or maximum [m]
$C_{b,cr}$	: critical value of $C_b$ above which $E_G$ becomes constant [m]
$C_t$	: clearance between upper end of draft tube and top of clear liquid [m]
d	: diameter of hole [m]
$D_i$	: inner diameter of draft tube [m]
$D_o$	: outer diameter of draft tube [m]
$D_T$	: inner diameter of bubble column [m]
$E_b$	: average gas holdup in bulk region [-]
$E_d$	: average gas holdup in draft tube region [-]
$E_f$	: average gas holdup in foam layer [-]
$E_G$	: average gas holdup [-]
$E_{G,cal}$	: calculated value of average gas holdup [-]
$E_{G,exp}$	: experimental value of average gas holdup [-]
$E_s$	: average gas holdup in the bubble column without a draft tube [-]
$F_{ai}$	: $D_i/D_T$ [-]
$F_r$	: Froude number $= (U_G/\sqrt{gD_T})$ [-]
g	: gravitational acceleration [m/s <sup>2</sup> ]
$H_L$	: clear liquid height [m]
$H_{L1}$	: $H_L - A$ [m]
$H_N$	: height of gas inlet [m]
$H_T$	: height of bubbling layer [m]
$H_{T1}$	: $H_T - A$ [m]
$L_d$	: length of draft tube [m]

M	: parameter defined by Eq. (12) [-]
n	: number of holes [-]
p	: pitch [m]
q	: parameter defined by Eq. (13) [-]
S	: cross-sectional area of bubble column [m <sup>2</sup> ]
$T_b$	: thickness of bulk region [m]
$T_d$	: thickness of draft tube region [m]
$T_{d1}$	: $T_d - A$ [m]
$T_f$	: thickness of foam layer [m]
$U_G$	: superficial gas velocity [m/s]
V	: volume of draft tube and steel pipe [m <sup>3</sup> ]
$Z_1$	: parameter defined by Eq. (10) [-]
$Z_2$	: parameter defined by Eq. (11) [-]

### REFERENCES

- Akita, K. and Yoshida, F., "Gas Holdup and Volumetric Mass Transfer Coefficient in Bubble Columns," *Ind. Eng. Chem. Des. Dev.*, **12**, 76 (1973).
- Bello, R. A., Robinson, C. W. and Moo-Yong, M., "Gas Holdup and Overall Volumetric Oxygen Transfer Coefficient in Airlift Contactors," *Biotech. and Bioeng.*, **27**, 369 (1985).
- Kawagoe, M., Inoue, T., Nakao, K. and Otake, T., "Regimes of Flow Patterns and Gas Holdups in Gas Sparged Contactors," *Kagaku Kogaku*, **38**, 733 (1974).
- Koide, K., Kurematsu, K., Iwamoto, S., Iwata, Y. and Horibe, K., "Gas Holdup and Volumetric Liquid-Phase Mass Transfer Coefficient in Bubble Column with Draught Tube and with Gas Dispersion into Tube," *J. Chem. Eng. Japan*, **16**, 412 (1983).
- Merchuk, J. C., Ladwa, N., Cameron, A., Bulmer, M. and Pickett, A., "Concentric-Tube Airlift Reactors: Effects of Geometrical Design on Performance," *AIChE J.*, **40**, 1105 (1994).
- Takahashi, T., Miyahara, T. and Shimizu, K., "Experimental Studies of Gas Void Fraction and Froth Height on a Perforated Plate-Low Clear Liquid Height under Liquid Stagnant Flow," *J. Chem. Eng. Japan*, **7**, 75 (1974).
- Yamashita, F. and Inoue, H., "Gas Holdup in Bubble Columns," *J. Chem. Eng. Japan*, **8**, 334 (1975).
- Yamashita, F., "Effect of Clear Liquid Height and Gas Inlet Height on Gas Holdup in a Bubble Column," *J. Chem. Eng. Japan*, **31**, 285 (1998).
- Weiland, P., "Influence of Draft Tube Diameter on Operation Behaviour of Airlift Loop Reactors," *Ger. Chem. Eng.*, **7**, 374 (1984).