

## Transfer rate measurement of lysozyme by liquid-liquid extraction using reverse micelles with dense CO<sub>2</sub>

Sun-Mi Jung\*, Un-Mi Shin\*, Md. Salim Uddin\*, Sun-Young Park\*\*, Hideki Kishimura\*\*\*,  
Gordon Wilkinson\*\*\*\*, and Byung-Soo Chun\*†

\*Institute of Food Science, Faculty of Food Science & Biotechnology, Pukyong National University, Busan 608-737, Korea

\*\*School of Pharmacy and Medical Sciences, University of South Australia, Adelaide, SA 5001, Australia

\*\*\*Research Faculty of Fisheries Sciences, Hokkaido University, Hakodate, Hokkaido 041-8611, Japan

\*\*\*\*School of Chemical Engineering, University of Adelaide, Adelaide, SA 5005, Australia

(Received 23 March 2009 • accepted 24 May 2009)

**Abstract**—Lysozyme was extracted from aqueous solution into *i*-octane using reverse micelles in the presence of pressurized CO<sub>2</sub>. A squat vessel with two independent stirrers was used to measure the mass transfer of the lysozyme across a planar interface. Mass transfer coefficient,  $k_L$ , of the lysozyme from the aqueous to the organic phase was measured at selected ionic strengths, pH, sodium bis(2-ethylhexyl) sulfosuccinate (AOT) surfactant concentrations, temperatures and pressurized CO<sub>2</sub>. The mass transfer rate of lysozyme was higher in high temperature (318 K) and pressure (20 MPa). pH of 9 in aqueous phase showed highest mass transfer rate of lysozyme. The application of pressurized CO<sub>2</sub> markedly increased the mass transfer rate of lysozyme comparing to conventional non-pressurized system.

Key words: Lysozyme, Reverse Micelle, Mass Transfer, Pressurized CO<sub>2</sub>, Sodium Bis(2-ethylhexyl) Sulfosuccinate (AOT)

### INTRODUCTION

With recent developments in biotechnology, protein separation using reverse micelles is considered for commercial applications. The separation of proteins using reverse micelles is rather easy to scale up and can be operated continuously [1]. Organic solvents containing reverse micelles have great potential as novel media for bioseparation and biocatalysis [2,3]. In particular, protein extraction using reverse micelles has gained much attention because liquid-liquid extraction can be performed, which is especially attractive for use in large-scale, continuous processing [4,5].

In a reverse micellar extraction process, water soluble proteins are transferred from an aqueous phase to an organic one containing a surfactant, in the form of micelles. Mass transfer rates and other characteristics need quantitation to support design studies enabling commercial utilization of this technique. Some research works have been carried out on the interfacial transport of proteins across an aqueous-organic interface. Dekker et al. [6] investigated mass transfer rates in the extraction of  $\alpha$ -amylase with a reverse micelle phase of the cationic surfactant triethylmethylammonium chloride (TOMAC) in *i*-octane. Dungan et al. [7] studied the transport of  $\alpha$ -chymotrypsin and cytochrome C between a bulk aqueous and an AOT-*i*-octane reverse micelle phase. The mass transfer processes in lysozyme extraction by AOT-*i*-octane reverse micelles were also studied by Lye et al. [8].

In this work lysozyme was selected as a model protein. Lysozyme is an industrially useful enzyme. Egg-white, which contains 3.5% (w/w) lysozyme, is a convenient source [9] and the anionic surfactant, AOT, used in this process, is known to form spherical nanom-

eter-sized molecular aggregates in a variety of non-polar solvents. The work has been done under an atmosphere of high-pressure CO<sub>2</sub>, which, by dissolving in the *i*-octane, caused expansion of the organic phase [10]. Carbon dioxide as a supercritical fluid has many excellent properties such as non-toxicity, non-explosiveness, ready availability and easy of removal from the extracted products [11]. In contrast to previous work using CO<sub>2</sub>, a significant effect was observed on the rate of transport of protein into the reverse micellar system. The purpose of this study was to explore the recovery efficiency at different conditions by measuring the mass transfer rates of lysozyme from a bulk aqueous phase via reverse micelles to a bulk organic phase which had been expanded by pressurized CO<sub>2</sub>.

### EXPERIMENTAL

#### 1. Materials

AOT (99%) was obtained from Aldrich Co. (USA), AR grade *i*-octane (99%) from Junsei Chemical Co. (Japan) and lysozyme (mucopeptide N-acetyl muramyl hydrolase, E. C. 3.2.1.17, molecular weight 14.3 kDa, pI 11.1) from hen egg-white obtained from Sigma Chemical Co. (USA). All other reagents were AR grade from Sigma.


Aqueous solutions were prepared by dissolving each of lysozyme (0.2 g/L) and KCl (0.1 M to 0.4 M, used to regulate ionic strengths) in Milli-Q water. Organic solutions were prepared by dissolving the desired amount of AOT in *i*-octane. The pH of aqueous solutions was adjusted within the range of 3.8 to 11.3 by addition of 0.1 M HCl or 0.1 M NaOH. The purity of CO<sub>2</sub> was 99%.

#### 2. Method

The extraction of lysozyme was performed in a liquid-liquid flat vessel designed by Lewis [12] using the high-pressure apparatus shown in Fig. 1. Mass transfer rates were measured in a stirred cy-

\*To whom correspondence should be addressed.

E-mail: bschun@pknu.ac.kr

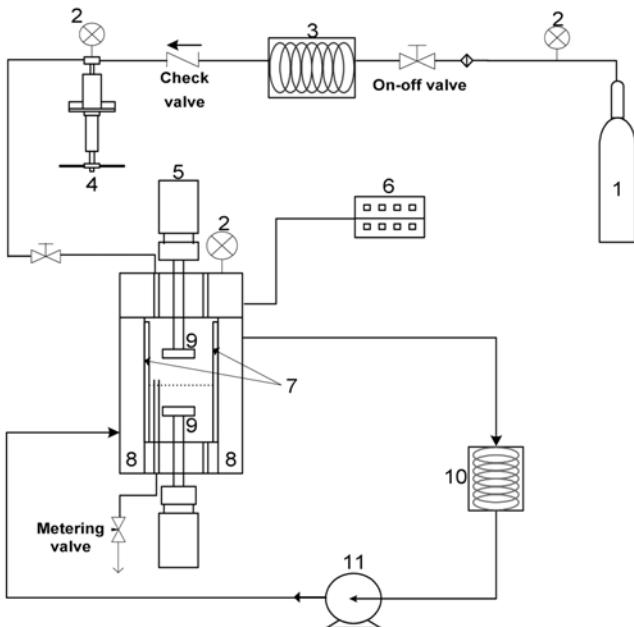

**Fig. 1.** Schematic diagram of lysozyme extraction by reverse micelle with pressurized CO<sub>2</sub>.

- |  |                    |
|--|--------------------|
| 1. CO <sub>2</sub> tank                    | 7. Baffle plates   |
| 2. Pressure gauge                          | 8. Water jacket    |
| 3. Cooling bath                            | 9. Impeller        |
| 4. High pressure generator                 | 10. Heat exchanger |
| 5. High pressure reactor                   | 11. Pump           |
| 6. Stirring speed & temperature controller |                    |

cylindrical vessel of 0.06 m diameter and 0.14 m height containing 4 equi-spaced longitudinal baffles. The two co-axially mounted impellers were independently driven. A water jacket was used to control temperature. The vessel volume was 400 mL charged with 200 mL of aqueous solution followed by 100 mL of organic solutions (AOT in *i*-octane) with pressurized carbon dioxide. The organic phase was mixed with *i*-octane and liquefied carbon dioxide completely. The applied pressure of CO<sub>2</sub> was 10 to 20 MPa and controlled by an appropriate high-pressure regulator. Both phases were stirred by the impellers at the same speed of 170 rpm rotating in the same direction in order to cause minimal disturbance to the flat interface between the aqueous and the organic phases while experiments. 1 mL aliquots were withdrawn from the aqueous phase at 2 minute intervals for analysis. After each run the concentration of lysozyme was determined by UV spectrophotometry according to Lowry et al. [13].

### MASS TRANSFER THEORY

In the mass transport process, protein transfer is envisaged to take place in three stages [6]. Initially the solute, which is dissolved in the aqueous phase, diffuses to the organic-water interface. This zone contains a high concentration of surfactant molecules which then capture the protein within reverse micelles (step 2). In step 3 the reverse micelles migrate into the bulk organic phase.

The mass transfer rate, R (mol/s), of lysozyme from aqueous to organic phase can be expressed by the following equation based on the two-film theory:

$$R = k_L a (C_{aq} - C_{aq,i}) \quad (1)$$

where,  $k_L$  (m/s) is the liquid phase mass transfer coefficient;  $a$  (m<sup>2</sup>), the cross-sectional area of vessel;  $k_L a$  (m<sup>3</sup>/s), the volumetric liquid phase mass transfer coefficient and  $C$  (mol/m<sup>3</sup>), the concentration of protein in the relevant phase. Subscript aq refer to the aqueous and i to the interfacial zone.

If H is the distribution coefficient of protein between the two phases, then the phase equilibrium relationship is:

$$H = C_{org,i}/C_{aq,i} \quad (2)$$

where, subscript org refers to the organic phase.

Combining Eqs. (1) and (2) and introducing the molar flux, J (mol/s·m<sup>2</sup>) of protein across the interface, we obtain [14,15]

$$J = R/a = (V/a) (-dC_{aq}/dt) = k_L \{C_{aq} - C_{org,i}/H\} \quad (3)$$

where, V (m<sup>3</sup>) is the volume of the aqueous phase containing the 'dissolved' protein. Recognizing that the amount of protein at the interface will be small and assuming favorable equilibrium, then its concentration at the interface will also be small and negligible compared with that held in the bulk concentration (i.e.,  $C_{org,i}/H \ll C_{aq}$ ). The controlling step in the mass transfer was assumed to be in the aqueous phase film owing to its higher viscosity over the organic phase. Eq. (3) can then be integrated, with the following boundary conditions: t=0,  $C_{aq} = C_o$  and t=t,  $C_{aq} = C_{aq,i}$ . Then


$$\ln(1 - C_{org}/C_o) = -(a/V) k_L t \quad (4)$$

The value of the cross-sectional area, a, was  $2.827 \times 10^{-3}$  m<sup>2</sup> calculated by the vessel geometric dimension. The mass transfer coefficient,  $k_L$  for the process is obtained from the slope of the  $-\ln(1 - C_{org}/C_o)$  versus t curve [16].


### RESULTS AND DISCUSSION

#### 1. Effects of Ionic Strength on Mass Transfer Rate


Protein solubilization into the organic phase is governed mainly by electrostatic interactions between the protein and the polar head

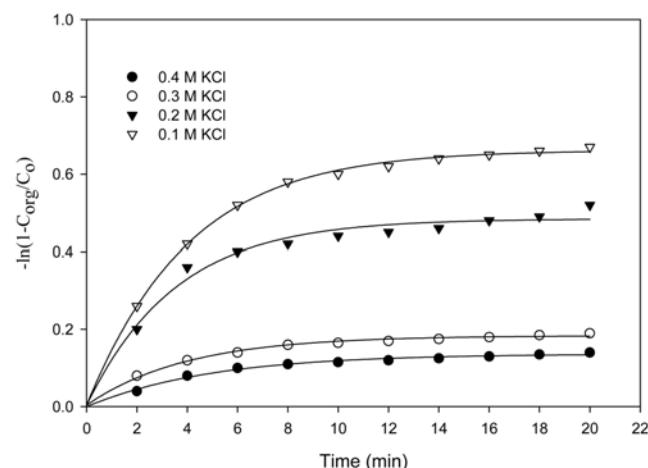


**Fig. 2.** Effect of KCl concentration on mass transfer rate of lysozyme by reverse micelle under pressurized CO<sub>2</sub> (lysozyme: 0.2 g/L, pH: 7, AOT: 20 mM, pressure: 15 MPa, temperature: 298 K).

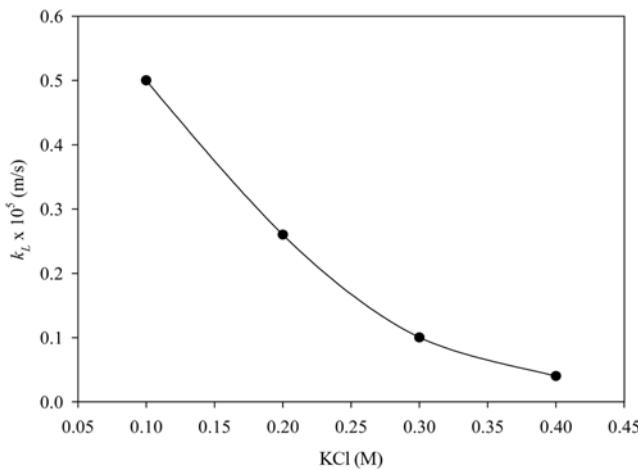

**Fig. 3.** Effect of ionic strength on mass transfer coefficient,  $k_L$ , of lysozyme (lysozyme: 0.2 g/L, pH: 7, AOT: 20 mM, pressure: 15 MPa, temperature: 298 K).

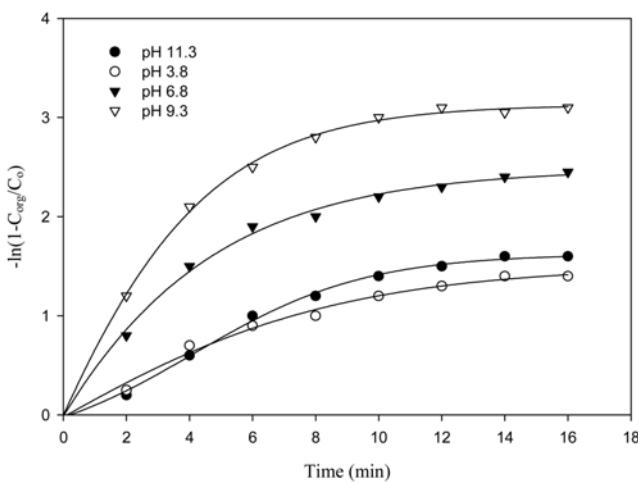


**Fig. 4.** Effect of pH on mass transfer rate of lysozyme by reverse micelle under pressurized  $\text{CO}_2$  (lysozyme: 0.2 g/L, KCl: 0.1 M, AOT: 20 mM, pressure: 15 MPa, temperature: 298 K).

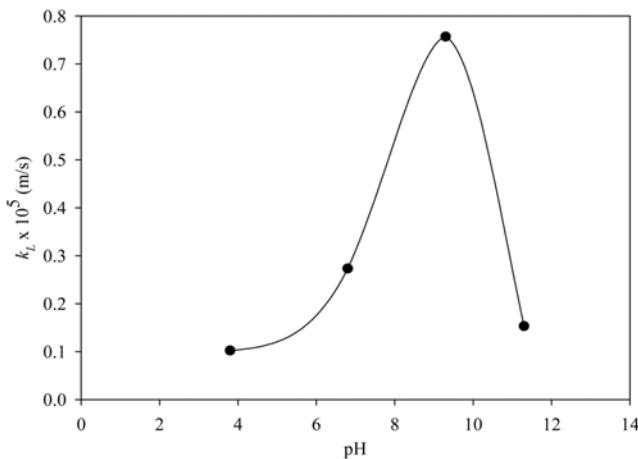


**Fig. 5.** Effect of pH on mass transfer coefficient,  $k_L$ , of lysozyme (lysozyme: 0.2 g/L, KCl: 0.1 M, AOT: 20 mM, pressure: 15 MPa, temperature: 298 K).


group of the AOT. The electrostatic interaction is affected by the ionic strength of the aqueous solutions. The influence of ionic strength is explained using the theory of “Debye screening” which states

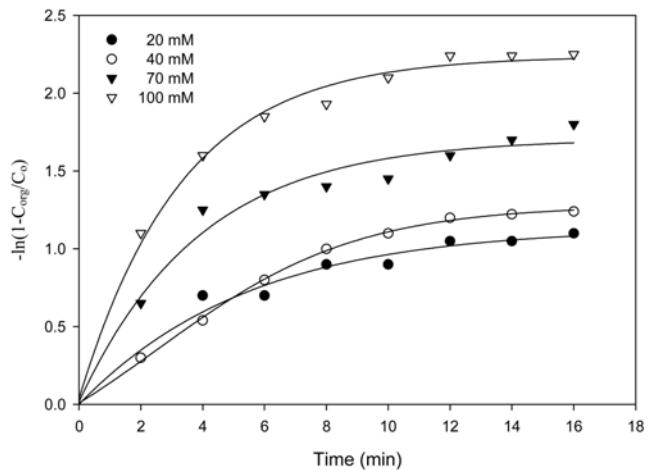

(a)

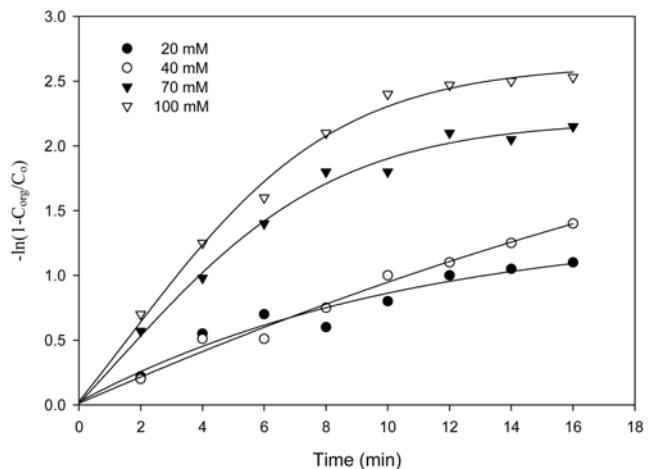

(b)

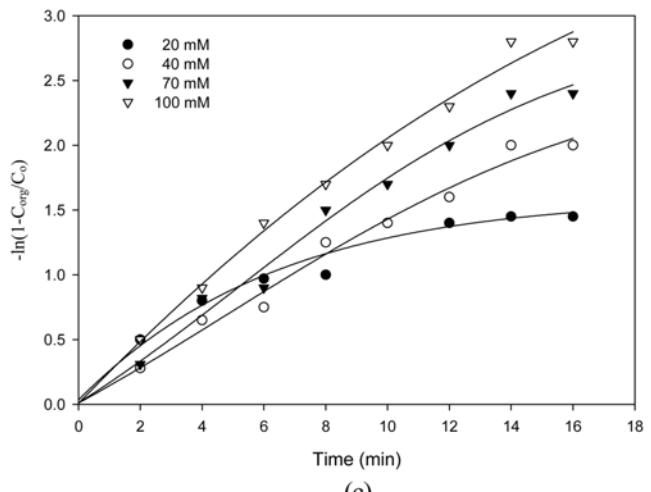

**Fig. 6.** Effect of AOT concentration on mass transfer rate of lysozyme by reverse micelle under pressurized  $\text{CO}_2$  (lysozyme: 0.2 g/L, pH: 7, KCl: 0.1 M, temperature: 298 K). (a) 10 MPa, (b) 15 MPa (c) 20 MPa.

that the range an electric field extends into an electrolyte solution decrease with increasing ionic strength [1].

Figs. 2 and 3 show the mass transfer rates of lysozyme at various ionic strengths (expressed as KCl concentration). It was found that the solubility of protein into the reverse micelle was reduced by increasing KCl concentration of the aqueous solution, and the mass transfer rate of lysozyme was decreased. The addition of KCl in the system caused a significant reduction of electrostatic attraction between the lysozyme molecules and the polar head group of AOT. Similar results were found in alkaline protease separation using reverse micelles [17].



## 2. Effects of pH on Mass Transfer Rate

The mass transfer rates of lysozyme at various pH of the aqueous solutions are given in Figs. 4 and 5. Results for the transferred lysozyme in the reverse micellar systems have been interpreted in terms of electrostatic interactions between charged amino acid residues on the protein surface and the electrical double-layer created by the surfactant head group. Lysozyme was solubilized in anionic reverse micelles. Lysozyme possessed a net positive charge at pH values below their isoelectric point (pI). It was also found that the largest mass transfer coefficient,  $k_L$ , was at pH 9.3, which is the nearest the pI of lysozyme. When the pH of aqueous solution crossed the value of pI, the mass transfer rate of lysozyme was decreased. The electrostatic repulsions between the negative charges of the protein and polar groups of AOT act as a suppression in the extraction, resulting in lower mass transfer rate. Similar results were found in protein extraction by reverse micelle [18,19]. Lye et al. [19] measured the volumetric liquid phase mass transfer coefficients,  $k_L$ , at 0.2 M KCl and different pH conditions with the well mixed systems. It was around  $0.3 \times 10^{-7}$  m<sup>3</sup>/s to  $43.4 \times 10^{-7}$  m<sup>3</sup>/s, which provided higher value than the flat interface system.

## 3. Effects of AOT Concentration in Pressurized CO<sub>2</sub>


Figs. 6 and 7 show the rate of protein transfer into the reverse micellar phase in the presence of CO<sub>2</sub> at selected anionic surfactant concentrations with pressure. The amount of lysozyme dissolved increased with the increasing surfactant concentration in pressurized CO<sub>2</sub>. The lysozyme transfer rate also increased at high pres-

sure. The critical micelle concentration (CMC) in this work was 100 mM AOT. When the concentration of surfactants is higher than the CMC, surfactants form micelles-spherical or rod-like aggregates

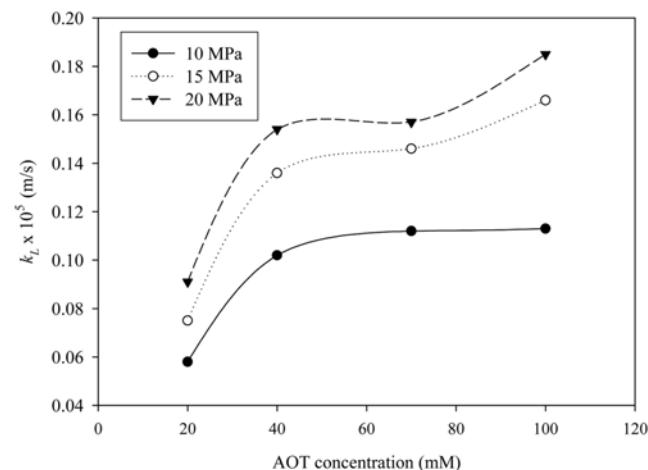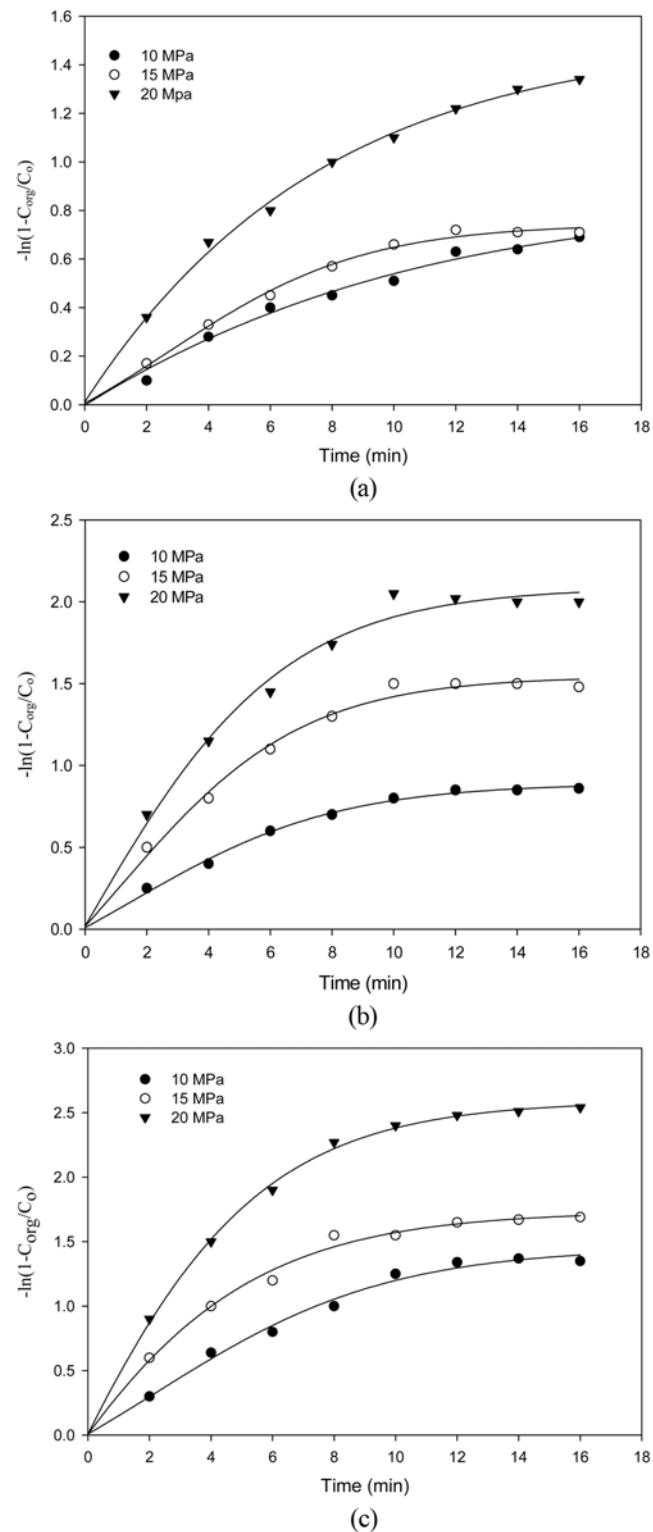

**Fig. 7. Effect of AOT concentration with pressure on mass transfer coefficient,  $k_L$ , of lysozyme (lysozyme: 0.2 g/L, KCl: 0.1 M, pH: 7, temperature: 298 K).**

**Fig. 8. Effect of temperature with pressure on mass transfer rate of lysozyme by reverse micelle under pressurized CO<sub>2</sub> (lysozyme: 0.2 g/L, KCl: 0.1 M, pH: 7, AOT: 20 mM). (a) 298 K (b) 308 K (c) 318 K.**

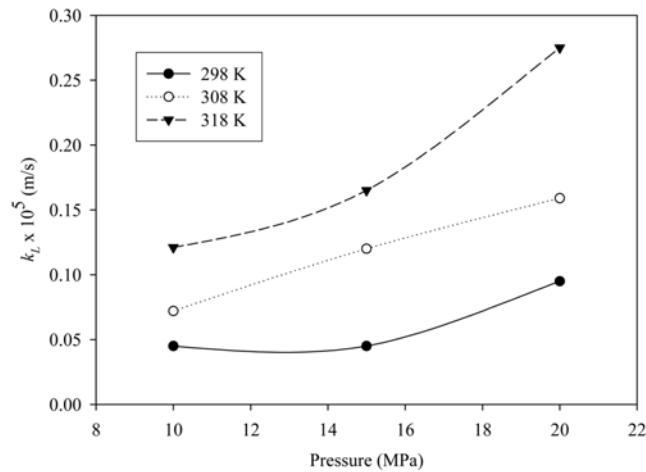

**Fig. 9. Effect of pressure and temperature on mass transfer coefficient,  $k_L$ , of lysozyme (lysozyme: 0.2 g/L, KCl: 0.1 M, pH: 7, AOT: 20 mM).**


[20]. It was difficult to measure the mass transfer rate beyond this concentration due to coagulation.

#### 4. Effect of Pressure and Temperature on Mass Transfer Rate of Lysozyme

The effects of temperature and pressure on protein transfer are shown in Figs. 8 and 9. The highest amount of lysozyme was solubilized at high pressure, 20 MPa. The take-up of  $\text{CO}_2$  into the water pools would be enhanced through ionization (i.e.,  $\text{H}_2\text{O} + \text{CO}_2 = \text{H}^+ + \text{HCO}_3^-$ ). Thus at the high pressure, lysozyme was able to transfer into the reverse micelles of the organic phase more readily. In pressurized  $\text{CO}_2$  atmosphere, the mass transfer rate was increased markedly. The influence of temperature on mass transfer of lysozyme was measured from 298 to 318 K. The range was deliberately limited since the enzymic activity of lysozyme is substantially lost above 318 K. It was found that the highest amount of lysozyme was solubilized at high temperature. The mass transfer rate of lysozyme was increased with increasing temperature.

#### 5. Measurement of the Mass Transfer Rate in Conventional (Atmospheric Pressure) and Pressurized $\text{CO}_2$

The mass transfer rate of lysozyme in conventional process (without  $\text{CO}_2$ ) and pressurized  $\text{CO}_2$  are given in Fig. 10. The mass transfer rate of lysozyme in pressurized  $\text{CO}_2$  was much higher than that

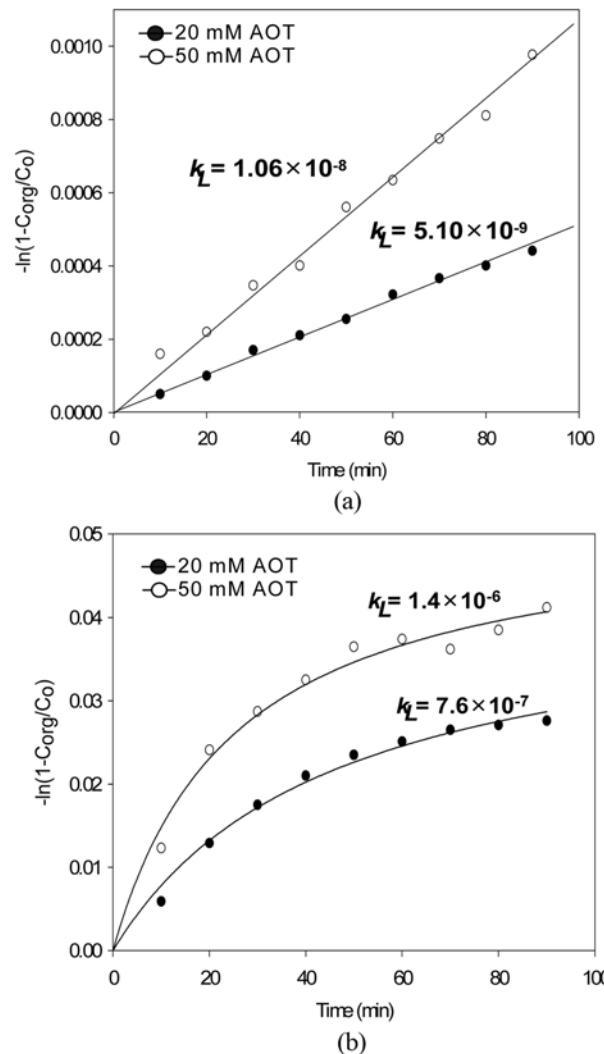

**Fig. 10. Mass transfer rate of lysozyme by reverse micelle (lysozyme: 0.2 g/L, KCl: 0.1 M, pH: 7, AOT: 20 mM, temperature: 298 K). (a) Conventional (0.1 MPa) (b) Pressurized  $\text{CO}_2$  (15 MPa).**

of the conventional process. Without pressurized  $\text{CO}_2$ , the transfer rate of lysozyme was uniform with time. On the other hand, in pressurized  $\text{CO}_2$ , lysozyme transferred more rapidly for the first 40 min

**Table 1. Mass transfer coefficients of lysozyme in atmospheric and pressurized conditions**

|          | $k_L \times 10^6$ (m/s)           |                                       | $k_L \cdot a \times 10^8$ (m <sup>3</sup> /s) |                                       | Conditions                   |
|----------|-----------------------------------|---------------------------------------|---|---------------------------------------|------------------------------|
|          | Atmospheric pressure<br>(0.1 MPa) | Pressurized<br>$\text{CO}_2$ (15 MPa) | Atmospheric pressure<br>(0.1 MPa)             | Pressurized<br>$\text{CO}_2$ (15 MPa) |                              |
| KCl (M)  | 0.1                               | 0.0127                                | 5.03  | 0.035                                 | Lysozyme 0.2 g/L, pH 7,      |
|          | 0.2                               | 0.0182                                | 2.65  | 0.051                                 | AOT 20 mM, 298 K             |
|          | 0.3                               | 0.0178                                | 1.20  | 0.050                                 |                              |
| pH       | 5                                 | 0.0055                                | 1.02  | 0.016                                 | Lysozyme 0.2 g/L, KCl 0.1 M, |
|          | 7                                 | 0.0073                                | 2.73  | 0.021                                 | AOT 20 mM, 298 K             |
|          | 9                                 | 0.0107                                | 7.57  | 0.030                                 |                              |
| AOT (mM) | 20                                | 0.0051                                | 0.76  | 0.014                                 | Lysozyme 0.2 g/L, pH 7,      |
|          | 50                                | 0.0106                                | 1.42  | 0.030                                 | KCl 0.1 M, 298 K             |

and then the transfer rate was decreased. Table 1 shows a comparison of mass transfer coefficients between the conventional and pressurized processes (15 MPa). The  $k_L$  values are about 70 to 700 times greater under the pressurized conditions. CO<sub>2</sub> reduces the interfacial tension in aqueous-organic systems [21]. This suggests that at least one effect of the pressurized CO<sub>2</sub> was to decrease the interfacial tension, resulting in higher  $k_L$  values. Asai et al. [22] and Park et al. [23] measured mass transfer coefficients of different solutes such as caproic acid, I<sub>2</sub> and cyclohexanol etc. at different conditions using an agitated vessel based on the Lewis system [12] with a flat interface between the aqueous and organic phases. They used the cross-sectional area of the vessel to calculate mass transfer coefficients. The values of the mass transfer coefficients were lower than the system mixed with pressurized carbon dioxide in the organic phase. The interfacial tension between the aqueous and the organic phases depends on the physical properties of the solutions. The organic phase mixed with pressurized carbon dioxide may decrease the interfacial tension which occurs at a high transfer rate of the solute [24].

## CONCLUSIONS

The transport of lysozyme between aqueous solution and AOT-*i*-octane solution was studied under high pressure of CO<sub>2</sub> using reverse micelles. The mass transfer rates were influenced by various ionic strengths, pH, AOT concentrations and temperatures. The mass transfer behavior was similar to the conventional process. However, the transfer rate of lysozyme was higher in pressurized CO<sub>2</sub> than atmospheric conditions. The values of  $k_L$  obtained from conventional process and pressurized process were around  $0.0051 \times 10^{-6}$  m/s to  $0.0182 \times 10^{-6}$  m/s and  $0.76 \times 10^{-6}$  m/s to  $7.57 \times 10^{-6}$  m/s, respectively. It was more effective to extract and separate protein using reverse micelle with pressurized CO<sub>2</sub>. A model can be developed for estimating mass transfer coefficients based on data obtained from an agitated vessel with a flat interface of two-phase system in which the organic phase contains complete mixtures with liquefied solvent.

## ACKNOWLEDGMENTS

This research was supported by a grant from Marine Bioprocess Research Center of the Marine Biotechnology Program funded by the Ministry of Land, Transport and Maritime, and partially by the Ministry of Knowledge and Economy, Korean Industrial Technology (KOTEF) through the Human Resources Training Project for Regional Innovation, Republic of Korea.

## REFERENCES

- M. J. Pires, M. R. Aires-Barros and J. M. S. Cabral, *Biotechnol. Prog.*, **12**, 290 (1996).
- Q. Lu, H. Chen, K. Li and Y. Shi, *Biochem. Eng. J.*, **1**, 45 (1998).
- K. Nagayama, S. Matsuura, T. Doi and M. Imai, *J. Mol. Cat. B*, **4**, 25 (1998).
- G. J. Lye, J. A. Asenjo and D. L. Pyle, *AIChE J.*, **42**, 713 (1996).
- T. Nishiki, I. Sato, A. Muto and T. Kataoka, *Biochem. Eng. J.*, **1**, 91 (1998).
- M. Dekker, K. Van't Riet, B. H. Bijsterbosch, P. Fijneman and R. Hilhorst, *Chem. Eng. Sci.*, **45**, 2949 (1990).
- S. R. Dungan, T. Bausch, T. A. Hatton, P. Plucinski and W. Nitsch, *J. Colloid Interface Sci.*, **145** 33 (1991).
- G. J. Lye, J. A. Asenjo and D. L. Pyle, *Chem. Eng. Sci.*, **49**, 3195 (1994).
- S. Jarudilokkul, E. Paulsen and D. C. Stuckey, *Bioseparation*, **9**, 81 (2000).
- H. Zhang, J. Lu and B. Han, *J. Supercritical Fluids*, **20**, 65 (2001).
- M. R. Housaindokht, B. Haghghi and M. R. Bozorgmehr, *Korean J. Chem. Eng.*, **24**, 102 (2007).
- J. B. Lewis, *Chem. Eng. Sci.*, **3**, 248 (1954).
- O. H. Lowry, N. J. Rosebrough, A. W. Farr and R. J. Randall, *J. Biol. Chem.*, **193**, 265 (1951).
- T. Nishiki, I. Sato, A. Muto and T. Kataoka, *Biochem. Eng. J.*, **1**, 91 (1998).
- Y. Nishii, S. Nii, K. Takahashi and H. Takeuchi, *J. Chem. Eng. Jpn.*, **32**, 211 (1999).
- B. S. Chun and G. T. Wilkinson, *Sep. Sci. Technol.*, **37**, 3323 (2002).
- H. H. Yoon, *Korean J. Biotechnol. Bioeng.*, **5**, 411 (1990).
- T. Kinugasa, S. I. Tanahashi and H. Takeuchi, *Ind. Eng. Chem. Res.*, **30**, 2470 (1991).
- G. J. Lye, J. A. Asenjo and D. L. Pyle, in Separation Biotechnology, Volume 3, D. L. Pyle Ed., Royal Society of Chemistry, UK (1994).
- H. Kim, K. Baek, B. K. Kim, H. J. Shin and J. W. Yang, *Korean J. Chem. Eng.*, **25**, 253 (2008).
- B. S. Chun and G. T. Wilkinson, *Ind. Eng. Chem. Res.*, **34**, 4371 (1995).
- S. Asai, J. Hatanaka and Y. Uekawa, *J. Chem. Eng. Jpn.*, **16**, 463 (1963).
- S. W. Park, B. S. Chun and G. T. Lim, *Korean Chem. Eng. Res.*, **28**, 594 (1990).
- G. M. Schneider, in Supercritical Fluids Fundamentals for Application, E. Kiran and J. M. H. L. Sengers Eds., Kluwer Academic Publishers, Boston, USA (1994).